


## Instructions for Ultima Plasma/LCD stand

- 1) Fix the base to the main stand assembly, using the two M8 nuts and washers and three M8x30 bolts and washers (As in picture 1).




- 2) Fix the universal Plasma/LCD wall bracket to the main stand assembly, using the four M6x25 domed screws and washers. (As in picture 2). Note you have two height positions.



- 3) Fix the left hand and right hand brackets to the back of your Plasma/LCD, using one of the four sizes of studs, nuts and washers provided, these only need to be finger tight when screwed into the back of your screen. When tightening up nuts, make sure the stud does not turn. (As in picture 3). Nylon spacers are optional.



- 4) Hook the screen into position. (As in picture 4).

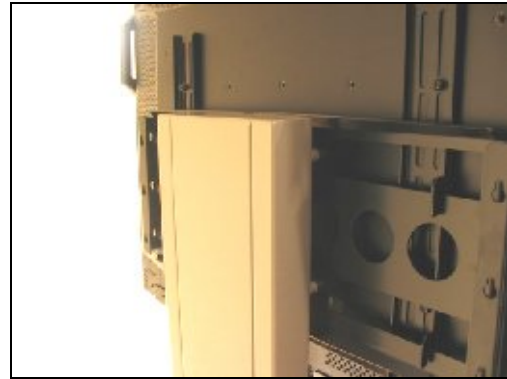

**Please note maximum weight of screen is 65kg, and 25 kg for shelf.**

- 5) Slide glass shelf into column. (As in picture 5).



- 6) Remove the rear cover, place the necessary cables into the column. Finally replace cover.

**Any queries please contact our technical department: (01438) 747202.**

### Notes for A2000 systems

- 1) A2000 to fit M8 nuts into main stand assembly x 2 + washers. And M8 nuts and bolts x 3 + washers.
- 2) Fit rubber feet x 4.
- 3) Fit cable cover to column.

### Fitting notes

- 1) Four off each M4, M5, M6, M8 studs, nuts and washers.
- 2) Four off M6x25 domed socket and washers.
- 3) Four off M6x10, M6x15 spacers.



Fixings for note 1.



Fixings for note 2.



Fixings for note 3.